STAGE 2

| Floor space: | 1,167 sq m 1 | |
|------------------------|---|--|
| Electrical - In stage: | 400a Po 12x 13a 3x 32a 2x 125 2x 63 6x 32a 6x 16a | |
| Loading access: | 2x Sectional | |
| Floor Loading: | 30kN/m2 | |
| Heating: | Gas fired | |
| Connectivity: | 6 outlets in s | |
| Wifi | Site-wide wir | |
| Water on stage | Belfast sink v feeds | |
| Fire Protection | Smoke detec | |
| Fire Extinguishers | Foam, CO2 | |
| Accessible WC | Yes | |



STAGE 2

SPECIFICATION & FLOORPLANS



2,558 sq ft

ower lock three-phase a twin switched sockets a three-phase 5a single phase a single phase a single phase a single phase


overhead 3.6m x 5.3m

stage

reless coverage

with hot/cold supply & 2x cold water

ction (can be isolated)

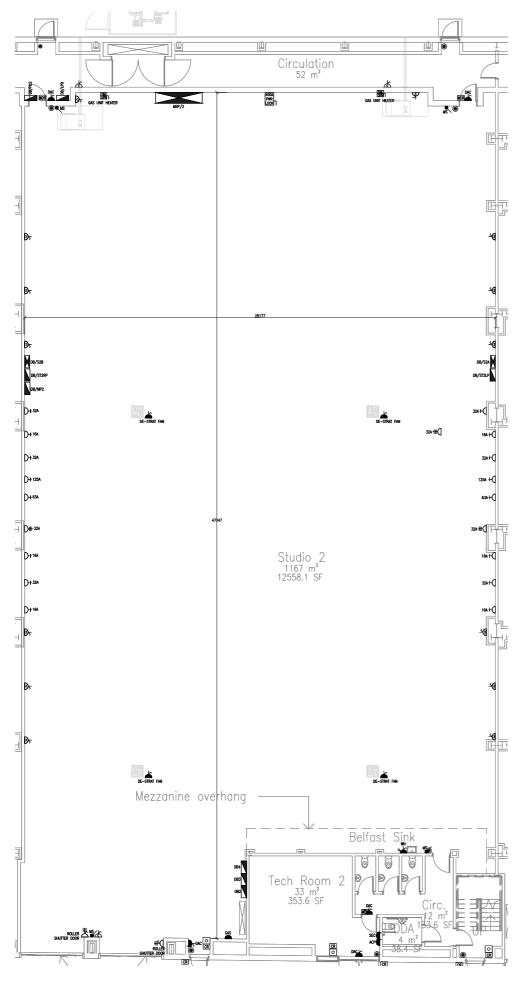





| LEGEND | |
|---------------------|--|
| SYMBOL | DESCRIPTION |
| ₹ | CLEANERS SOCKET OUTLET |
| Å | SINGLE SWITCHED SOCKET OUTLET |
| Ъ | TWIN SWITCHED SOCKET OUTLET |
| Á | SWITCHED FUSED SPUR |
| 4 | SWITCHED FUSED SPUR WITH FLEX OUTLET |
| | UNSWITCHED FUSED SPUR |
| | UNSWITCHED FUSED SPUR WITH FLEX OUTLET |
| Ŧ | SINGLE PHASE INDUSTRIAL SOCKET |
| 恚 | THREE PHASE INDUSTRIAL SOCKET |
| | ISOLATOR |
| 400A PWR LOCK | 400A POWER LOCK |
| | 3 PHASE DISTRIBUTION BOARD |
| \square | SINGLE PHASE DISTRIBUTION BOARD |
| | MCCB PANEL BOARD |
| G MS | MASTER LIGHT SWITCH |
| ۲ | MANUAL CALL POINT |
| 0 | ACCESS CONTROL GREEN BREAK GLASS |
| CR | CARD READER |
| WDR | WIRELESS CARD READER IN DOOR LOCK |